

MODULE **VDS**

DATASHEET

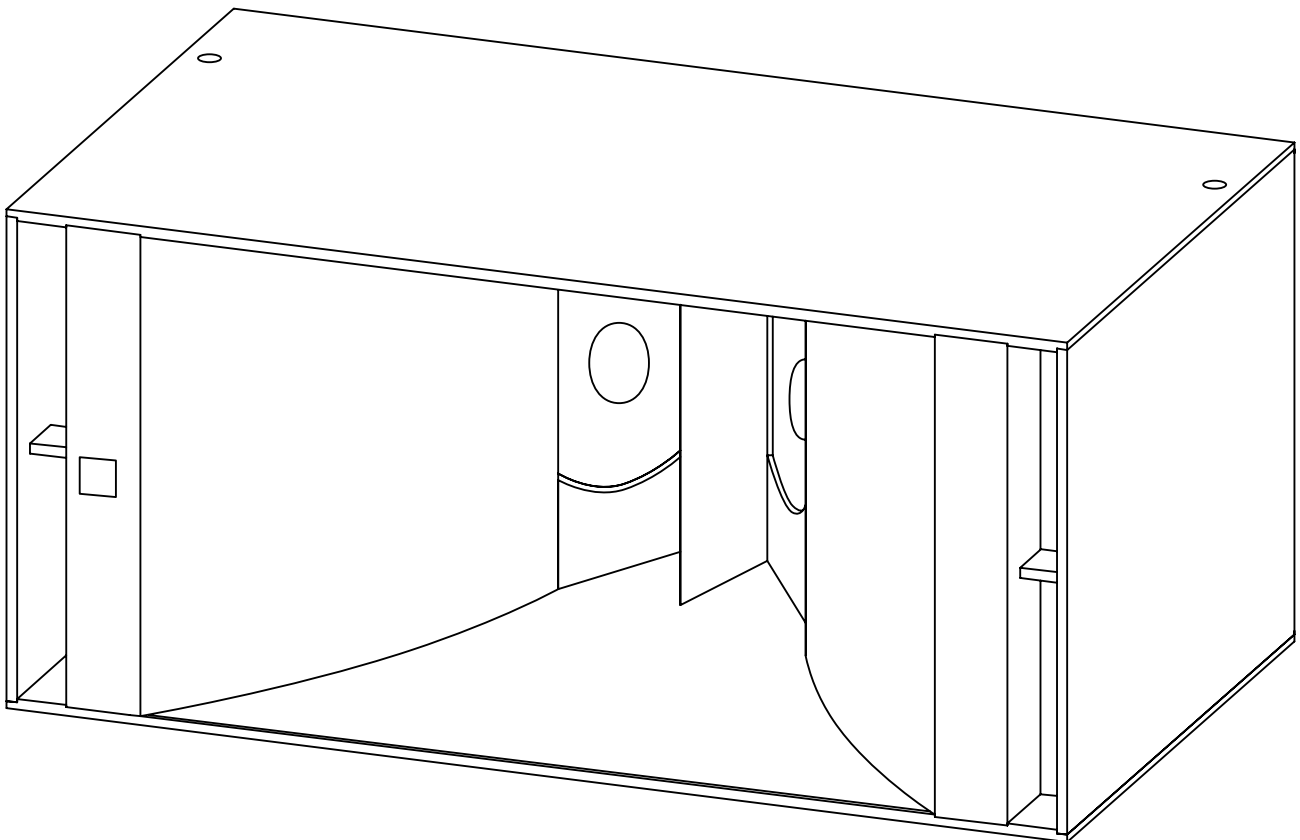

DOUBLE 15INCH TRANSDUCER

High low frequency level - low consumption

WIDEBAND WOOFER

Plays up to 600Hz

LARGE VENT

low particle velocity and plays down to 40Hz

EXPONENTIAL HORN


Excellent acoustic loading

VDS


ACOUSTIC FEATURES

- Full range, stand alone enclosure
 - Hybrid acoustic loading: LF horn + vented enclosure, HF fully horn loaded
 - Birch plywood reinforced 15mm
 - Textured polyurethan finish
- Optional : Speaker stand adaptor / stands / corner protectors / recessed handles

FREQUENCY RESPONSE (+/- -3dB)	40-630Hz
CONTINUOUS POWER HANDLING (NOMINAL PROGRAM POWER CAPACITY + 3dB)	2000W
SENSITIVITY (1W@1M)	108dB SPL
IMPEDANCE	4ohms
TRANSDUCERS	2x15" neodymium
MAX SPL (@1M, PINK NOISE 6dB CREST FACTOR)	144dB SPL
DIMENSIONS (LXPXH)mm	1500x850x700
WEIGHT	80kg

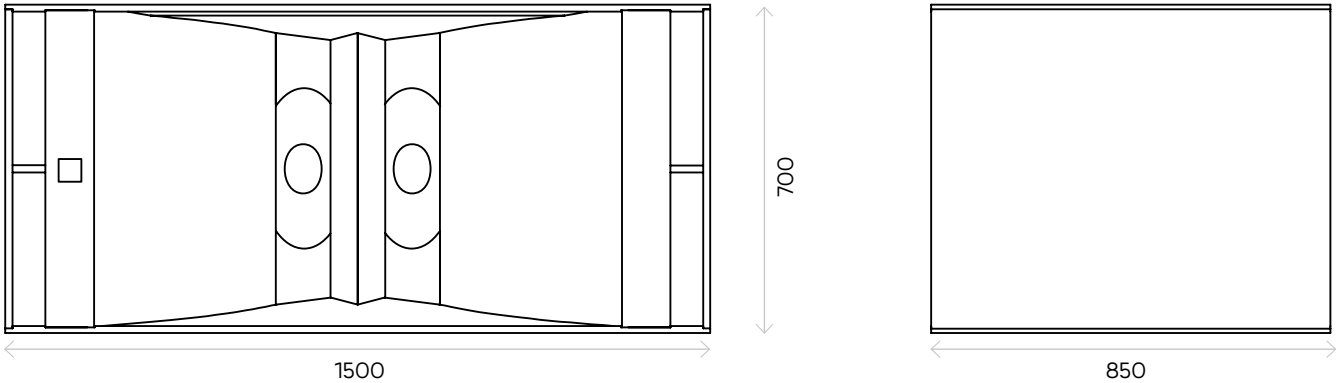

COMPATIBILITY

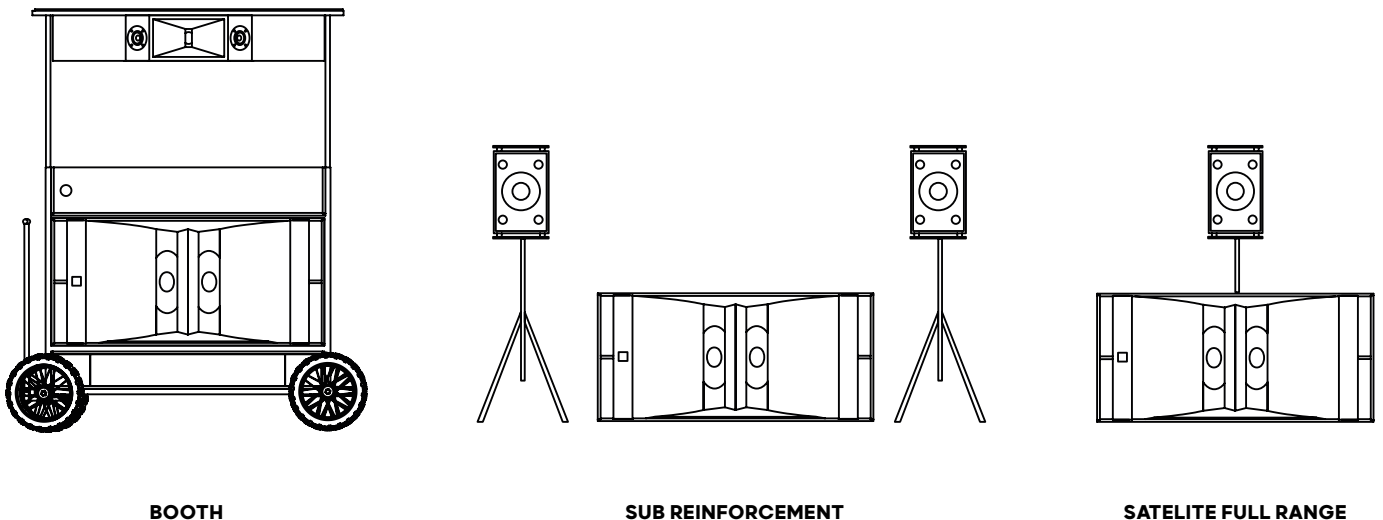

Contact@pikip-solarspeakers.com

91 av Edouard Vaillant
93500 Pantin